



**MASON U.K.**

VIBRATION CONTROL PRODUCTS AND  
ACOUSTIC FLOOR SYSTEMS

## **MASON 30N Series Spring Hanger (25mm Deflection)**




### **Installation Instructions**

- Mason 30N series spring hangers can compress up to 25mm at rated capacity.
- Please allow for the compression of the spring hanger when installing ceiling systems.

Mason U.K. Ltd.  
Unit 6 Abbey Business Park  
Monks Walk  
Farnham, Surrey  
GU9 8HT

Phone: 01252 716610  
Fax: 01252 716630  
E-mail: [info@mason-uk-co.uk](mailto:info@mason-uk-co.uk)  
Web: [www.mason-uk.co.uk](http://www.mason-uk.co.uk)

## Typical Installation for Mason 30N Series Spring Hangers

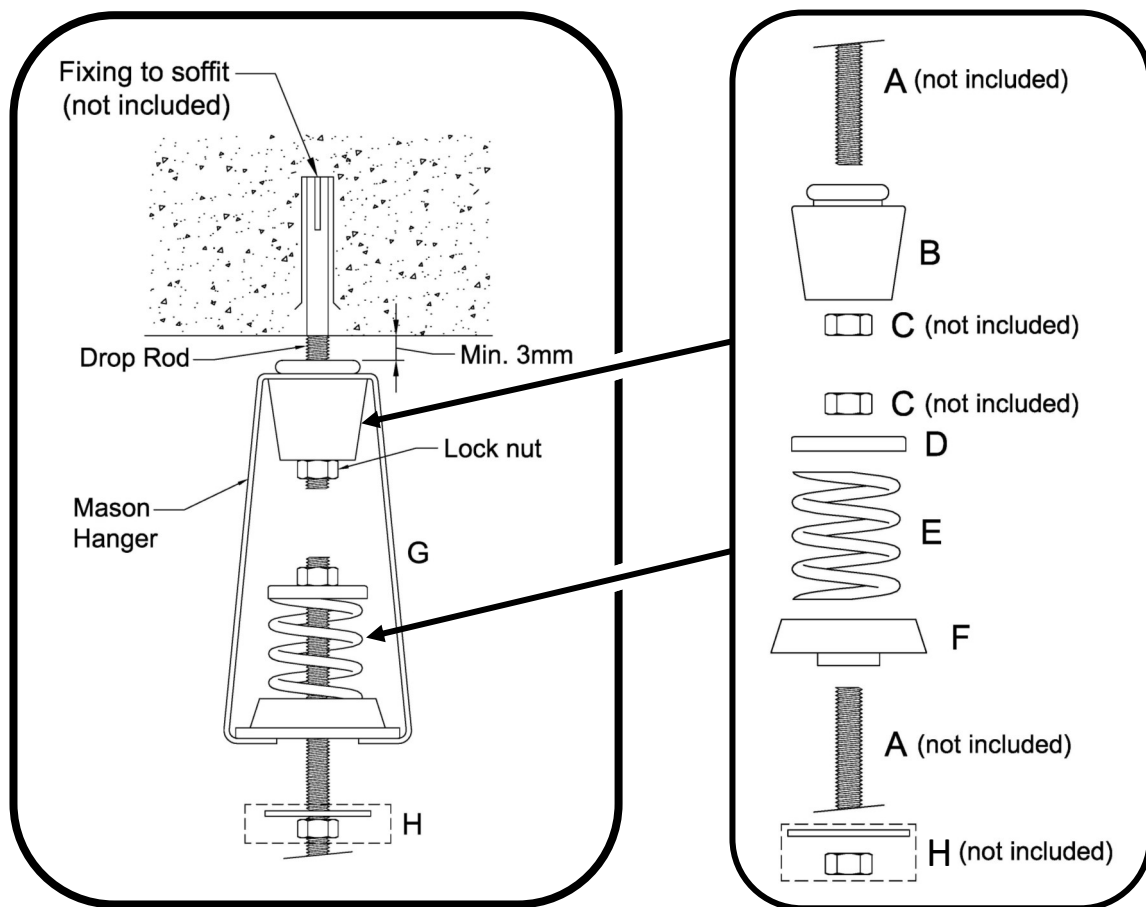

<b>A</b>	-	Drop rod (not supplied)
<b>B</b>	-	Rubber element
<b>C</b>	-	Self-locking nut (not supplied)
<b>D</b>	-	Metal cup
<b>E</b>	-	Spring element
<b>F</b>	-	Rubber cup
<b>G</b>	-	Mason hanger box
<b>H</b>	-	Optional penny washer & nut

### Installation instructions:

- Fix the top of the drop rod to the soffit, bracket or ceiling joist as required.
- Assemble the hanger as above.
- If desired, pre-compress spring with large penny washer and nut on underside by a maximum of 10mm.
- Set all the hangers to the same height by laser or similar method.
- Install the ceiling system in the normal way.

Mason U.K. Ltd.  
Unit 6 Abbey Business Park  
Monks Walk  
Farnham, Surrey  
GU9 8HT

Phone: 01252 716610  
Fax: 01252 716630  
E-mail: [info@mason-uk.co.uk](mailto:info@mason-uk.co.uk)  
Web: [www.mason-uk.co.uk](http://www.mason-uk.co.uk)